


FIAMM

Industrial Batteries


FG series

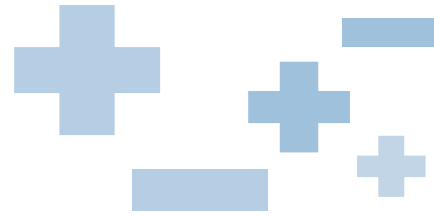

Valve Regulated Lead-Acid batteries

All FIAMM batteries have been specifically developed to enhance economy of operation, reliability and energy output. The values reached in these areas position FIAMM batteries on the top of the market, representing the ideal solution for all applications.

TPF*: Terminal Position Figure

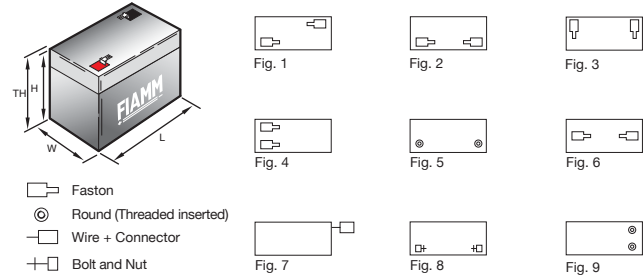

Model	VdS	Nominal voltage (V)	Capacity (Ah)				Weight (gr)	TPF*	Dimensions (mm)				Max discharge current 5" (A)	Temp. (°C)			Max charge current (A)	Terminal Type
			Discharge 20 h rate 1.75V/cell	Discharge 10 h rate 1.75V/cell	Discharge 5 h rate 1.70V/cell	Discharge 1.5 h rate 1.60V/cell			L	W	H	TH		Charge	Discharge	Storage		
FG10121		6	1.2	1.08	1.00	0.78	315	6	97	24	52	59	12	0 ÷ 40	-20 ÷ 50	-20 ÷ 50	0.3	FAST-ON 4.8
FG10301	•	6	3.0	2.7	2.55	1.95	715	2	134	34	60	67	30				0.75	FAST-ON 4.8
FG10381		6	3.8	2.88	2.72	2.08	710	3	66	33	118	125	38				0.95	FAST-ON 4.8
FG10451		6	4.5	3.6	3.4	2.6	700	1	70	47	100	106	45				1.13	FAST-ON 4.8
FG10501		6	5.0	4.0	3.8	2.9	820	1	70	47	100	106	50				1.25	FAST-ON 4.8
FG10721		6	7.2	6.3	5.95	4.55	1225	3	151	34	94	100	72				1.8	FAST-ON 4.8
FG11201/2	•	6	12	10.8	9.6	7.5	1900	2	151	50	93	99	120				3	FAST-ON 4.8 / 6.3

FG20086		12	0.8	0.72	0.63	0.53	350	7	96	25	62	62	8	0 ÷ 40	-20 ÷ 50	-20 ÷ 50	0.2	WIRE+CONNECTOR
FG20121	•	12	1.2	1.06	0.98	0.8	630	4	97	49	51	57	12				0.3	FAST-ON 4.8
FG20121A	•	12	1.2	1.08	1.0	0.78	600	4	97	43	52	59	12				0.3	FAST-ON 4.8
FG20201	•	12	2.0	1.83	1.65	1.37	930	2	178	35	60	67	20				0.5	FAST-ON 4.8
FG20271		12	2.7	2.43	2.25	1.76	1130	3	79	56	99	105	27				0.68	FAST-ON 4.8
FG20341		12	3.4	3.0	2.9	2.2	1410	4	134	67	60	67	34				0.85	FAST-ON 4.8
FG20451		12	4.5	4.1	3.8	3.0	1580	3	90	70	101	107	45				1.13	FAST-ON 4.8
FG20721/2	•	12	7.2	6.7	6.0	5.0	2430	4	151	65	94	100	72				1.8	FAST-ON 4.8 / 6.3
FG21201/2	•	12	12	11.3	10	8.4	3730	4	151	98	95	100	120				3	FAST-ON 4.8 / 6.3
FG21703	•	12	17	15.5	13.9	11.2	5900	8	181	76	167	167	170				4.25	FLAG Ø 5.5
FG21803		12	18	16.9	15	12.7	5900	8	181	76	167	167	180				4.5	FLAG Ø 5.5

EXTENDED LIFETIME	FG22703/5	•	12	27	24.4	22.1	18.4	8500	8/5	166	175	125	125	270	0 ÷ 40	-20 ÷ 50	-20 ÷ 50	6.8	FLAG Ø 5.5 / ROUND M5
	FG24204/7	•	12	42	37.9	34.4	28.5	13800	8/5	197	165	170	170	400				10.5	FLAG Ø 6.5 / ROUND M6
	FG25507		12	55	49.6	45	37.3	18500	5	229	138	207	212	500				13.8	ROUND M6
	FG26505/7	•	12	65	58.3	54	45.1	23200	5	272	166	191	195	580				16.3	ROUND M5 / ROUND M6
	FG27004/7	•	12	70	64.4	58.5	47.4	22600	8/5	350	166	174	174	600				17.5	FLAG Ø 6.5 / ROUND M6
	FG28009		12	80	73	66.9	54.2	26800	5	259	168	209	213	650				20	ROUND M8
	FG2A007		12	100	94	85	70.8	32800	5	329	172	214	221	750				25	ROUND M6
	FG2C007		12	120	112	102	85	38000	5	407	173	235	235	800				30	ROUND M6
	FG2F009		12	150	141	127	106	46200	5	483	170	220	220	900				38	ROUND M8
	FG2M009		12	200	188	170	141	66000	9	500	226	235	235	1000				50	ROUND M8

Constant Current discharge table (Amperes)

Final Voltage: 1.65 V/cell - Temperature: 25°C

Model	5 min	10 min	15 min	20 min	30 min	45 min	1 hour	2 hours	3 hours	5 hours	10 hours	20 hours
FG20721	27.1	18.3	13.8	11.1	8.11	5.91	4.73	2.66	1.88	1.21	0.67	0.37
FG21201/2	38	26.9	20.7	16.7	12.5	9.21	7.42	4.23	3.14	2.02	1.12	0.62
FG21803	58.3	39.3	29.7	24.1	17.9	13.3	10.8	6.28	4.61	3.06	1.7	0.93
FG22703/5	84.5	60.6	47.7	39.4	28.7	21.1	17.6	9.68	6.93	4.54	2.53	1.39
FG24204/7	146	101	76.5	62.7	46.9	34	26.7	14.6	10.5	6.97	3.87	2.16
FG25507	176	128	98.7	80.5	59.8	43.6	34.2	19.3	13.9	9.2	5.1	2.81
FG26505	208	152	117	95.2	70.6	51.5	40.5	22.8	16.4	10.9	6.03	3.32
FG27004/7	224	164	126	102	76.1	55.5	43.6	24.5	17.7	11.7	6.49	3.58
FG28009	247	181	148	122	90.9	65.8	51.7	28.7	20.4	13.4	7.58	4.07
FG2A007	309	226	186	152	114	82.2	64.7	35.9	25.5	16.7	9.47	5.09
FG2C007	371	271	223	183	136	98.7	77.6	43.1	30.6	20.1	11.4	6.11
FG2F009	464	339	278	228	170	123	97	53.8	38.3	25.1	14.2	7.63
FG2M009	618	452	371	304	227	164	129	71.8	51	33.4	18.9	10.2


Constant Power discharge table (Watts per bloc)

Final Voltage: 1.65 V/cell - Temperature: 25°C


Model	5 min	10 min	15 min	20 min	30 min	45 min	1 hour	2 hours	3 hours	5 hours	10 hours	20 hours
FG20721	272	189	146	119	88.8	65.9	53.3	30.5	21.7	14.1	7.84	4.34
FG21201/2	382	278	218	179	137	103	83.8	48.4	36.2	23.4	13.1	7.23
FG21803	585	406	313	258	196	148	122	71.8	53.1	35.5	19.8	10.9
FG22703/5	848	626	503	423	314	235	199	111	79.9	52.7	29.4	16.3
FG24204/7	1469	1040	806	673	513	379	301	167	121	81	45.1	25.2
FG25507	1768	1327	1039	864	654	487	387	220	160	107	59.4	32.9
FG26505	2089	1568	1228	1021	773	575	457	261	189	126	70.2	38.8
FG27004/7	2250	1688	1322	1100	833	619	492	281	204	136	75.6	41.8
FG28009	2595	1938	1607	1326	1000	729	577	324	231	153	87	47
FG2A007	3244	2423	2009	1658	1250	912	721	405	289	191	109	58.7
FG2C007	3893	2907	2411	1990	1500	1094	865	486	347	229	131	70.5
FG2F009	4866	3634	3014	2487	1875	1367	1081	607	434	286	163	88.1
FG2M009	6488	4846	4018	3316	2500	1823	1442	810	579	382	218	117

Terminal type (last digit of model number)


■ Type 1
Faston 4.8




■ Type 2
Faston 6.3




■ Type 3
Flag M5



■ Type 4
Flag M6



■ Type 6
Wire and connector



■ Type 5 / 7 / 9

